



HYDRAFORCE CARTRIDGE QUICK REFERENCE

Poppet, 2-Way, Normally Closed

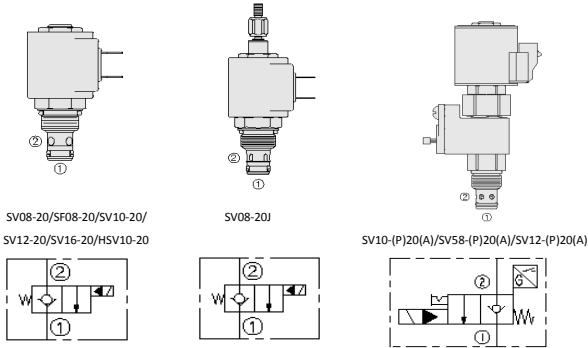

Cartridge Size	Flow	Option (* Select Option)	Line Body			
SV08-20*-6T-N-***/**	23 lpm / 6 gpm	None = Blank	6T	Alum.	7024660	9/16" UNF
SV08-20J/Y-8T-N-***/**	23 lpm / 6 gpm	S = 150u Screen	6T	Alum.	7024660	9/16" UNF
SF08-20*-6TD-P-***/**	19 lpm / 5 gpm	M = Manual Override	6TD	Duct. Iron	7151010	9/16" UNF
SV10-(P)20(A)*-8T-N-***/**	45 lpm / 12 gpm		8T	Alum.	7024280	3/4" UNF
HSV10-20*-8HT-U-***/**	76 lpm / 20 gpm		8HT	Duct. Iron	7158110	3/4" UNF
SV12-(P)20(A)*-10T-N-***/**	114 lpm / 30 gpm		10T	Alum.	7022240	7/8" UNF
HSV12-20*-16HT-U-***/**	114 lpm / 30 gpm		16HT	Duct. Iron	7158420	1-5/16" UNF
SV16-20*-12T-N-***/**	132 lpm / 35 gpm		12T	Alum.	7023230	1-1/16" UNF
SV58-(P)20(A)*-6TD-P-***	18.9 lpm / 5 gpm		6TD	Duct. Iron	7151010	9/16" UNF
Seals	Voltage (Standard Coils)***	Voltage (E Coils)***	Termination (Standard VDC Coils)	Termination (Standard AC Coils)	Termination (Standard E Coils)**	
N = Buna N	12 = 12VDC	12 = 12VDC	DS = Dual Spade	AG = Din (6316115/6316230)	ER = Deutsch DT04-2P (IP69K) (4303612/4303624)	
N = Buna N	24 = 24VDC	24 = 24VDC	DG = Din (6306012/6306024)		EY = Metric-Pack 150 (IP69K)	
P = Polyurethane	115 = 115VAC		DL = Leadwires			
N = Buna N	230 = 230VAC		DL/W = Leadwires/weatherpak			
U = Urethane			DR = Deutsch DT04-2P			
N = Buna N						
U = Urethane						
N = Buna N						
P = Polyurethane						

Poppet, 2-Way, Normally Open

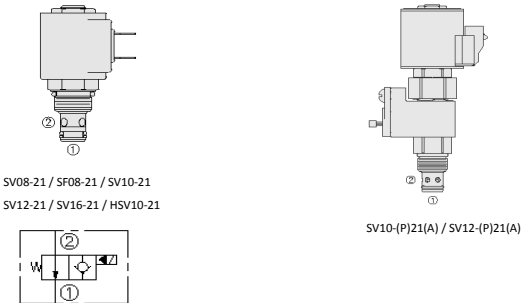

Cartridge Size	Flow	Option (* Select Option)	Line Body			
SV08-21*-6T-N-***/**	30 lpm / 8 gpm	None = Blank	6T	Alum.	7024660	9/16" UNF
SF08-21*-6TD-P-***/**	30 lpm / 8 gpm	P = MANUAL O/RIDE NO K	6TD	Duct. Iron	7151010	9/16" UNF
SV10-(P)21(A)*-8T-N-***/**	68 lpm / 18 gpm	K = MANUAL O/RIDE KNO	8T	Alum.	7024280	3/4" UNF
HSV10-21*-8HT-U-***/**	76 lpm / 20 gpm	HP = MANUAL O/RIDE WITH	8HT	Duct. Iron	7158110	3/4" UNF
SV12-(P)21(A)*-10T-N-***/**	114 lpm / 30 gpm	S = 150u Screen	10T	Alum.	7022240	7/8" UNF
SV16-21*-12T-N-***/**	132 lpm / 35 gpm		12T	Alum.	7023230	1-1/16" UNF
Seals	Voltage (Standard Coils)***	Voltage (E Coils)***	Termination (Standard VDC Coils)	Termination (Standard AC Coils)	Termination (Standard E Coils)**	
N = Buna N	12 = 12VDC	12 = 12VDC	DS = Dual Spade	AG = Din (6316115/6316230)	ER = Deutsch DT04-2P (IP69K) (4303612/4303624)	
P = Polyurethane	24 = 24VDC	24 = 24VDC	DG = Din (6306012/6306024)		EY = Metric-Pack 150 (IP69K)	
N = Buna N	115 = 115VAC		DL = Leadwires			
U = Urethane	230 = 230VAC		DL/W = Leadwires/weatherpak			
N = Buna N			DR = Deutsch DT04-2P			
N = Buna N						