



HYDRAFORCE CARTRIDGE QUICK REFERENCE

Spool, 5-Way, 3-Position with Load Sense Port

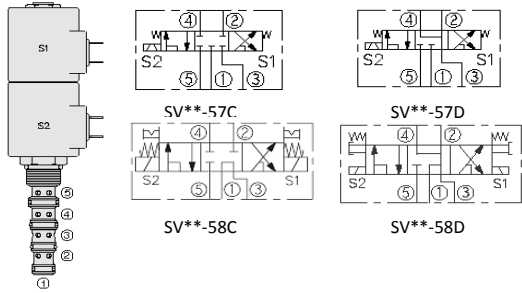

Cartridge Size	Flow	Option (* Select Option)	Line Body			
SV10-57C*-6T-N-***/**	15 lpm / 4 gpm	M = MANUAL O/RIDE	6T	Alum.	7022820	9/16" UNF
SV10-57D*-6T-N-***/**	15 lpm / 4 gpm	B = Knob	6T	Alum.	7022820	9/16" UNF
SV08-58C*-6T-N-***/**	13 lpm / 3.5 gpm	K = MANUAL O/RIDE KNOB	6T	Alum.	7025860	9/16" UNF
SV10-58C*-8T-N-***/**	30 lpm / 8 gpm		8T	Alum.	7022830	3/4" UNF
SV08-58D*-6T-N-***/**	13 lpm / 3.5 gpm		6T	Alum.	7022820	9/16" UNF
SV10-58D*8T-N-***/**	30 lpm / 8 gpm		8T	Alum.	7022830	3/4" UNF
Seals	Voltage (Standard Coils)*	Voltage (E Coils)***	Termination (Standard V)	Termination (Standard AC)	Termination (Standard E Coils)**	
N = Buna N	12 = 12VDC	12 = 12VDC	DS = Dual Spade	AG = Din (6316115/63162)	ER = Deutsch DT04-2P (IP69K) (4303612/4303624)	
	24 = 24VDC	24 = 24VDC	DG = Din (6306012/6306024)		EY = Metric-Pack 150 (IP69K)	
	115 = 115VAC		DL = Leadwires			
	24 = 24VDC	24 = 24VDC	DG = Din (6306012/6306024)		EY = Metric-Pack 150 (IP69K)	
	115 = 115VAC		DL = Leadwires			

Spool, 5-Way, 3-Position, with Power Beyond Port



Cartridge Size	Flow	Option (* Select Option)	Line Body			
SV10-59D*-6T-***/**	15.1 lpm / 4 gpm	M = MANUAL O/RIDE	6T	Alum.	7022820	9/16" UNF
Seals	Voltage (Standard Coils)*	Voltage (E Coils)***	Termination (Standard V)	Termination (Standard AC)	Termination (Standard E Coils)**	
N = Buna N	12 = 12VDC	12 = 12VDC	DS = Dual Spade	AG = Din (6316115/63162)	ER = Deutsch DT04-2P (IP69K) (4303612/4303624)	
	24 = 24VDC	24 = 24VDC	DG = Din (6306012/6306024)		EY = Metric-Pack 150 (IP69K)	
	115 = 115VAC		DL = Leadwires			
	24 = 24VDC	24 = 24VDC	DG = Din (6306012/6306024)		EY = Metric-Pack 150 (IP69K)	
	115 = 115VAC		DL = Leadwires			